RAYCOS LIGHTING

PROJECT NAME **DATE** **NOTE**

MWP SERIES · SELECTABLE LED WALL PACK

LED MINI WALL PACK

BRONZE HOUSING · PHOTOCELL · IP66

MINI WALL PACK

Selectable wattage + selectable CCT



- 3 WATTAGES
- 3 COLOR TEMPERATURES
- 0-10 V DIMMING
- PHOTOCELL PRE-INSTALLED

MWP-962-3W3CCT



APPLICATION Entrances · walkways · corridors · patios · decks · common areas

PERFORMANCE AT A GLANCE

Selectable field settings

WATTAGE	LUMEN OUTPUT	CCT
15 / 20 / 25 W	1,800 / 2,400 / 3,000 lm	3000 / 4000 / 5000 K

INPUT	DIMMING	LOCATION RATING
100-277 VAC · 50/60 Hz	0-10 V	IP66 · wet location

SPECIFICATIONS + CONTROLS

ETL · DLC · PF > 0.9 · CRI > 80 · 50,000+ HOURS

Model	MWP-962-3W3CCT
Wattage	15 / 20 / 25 W selectable
Dimming	0-10 V
Lumen output	1,800 / 2,400 / 3,000 lm
Input voltage	100-277 VAC · 50/60 Hz
CCT	3000 / 4000 / 5000 K selectable
CRI	Ra > 80
Working temperature	-4°F to +113°F / -20°C to +40°C
Environment	Wet locations · IP66
Lens	Clear striped lens
Rated life	L70 lumen maintenance · 50,000+ hours
Housing finish	Bronze
Accessory option	PC: photocell control pre-installed
DLC ID	S-K4BGAD
Quantity	10 pieces per box

PRODUCT DIMENSIONS

INCHES · MILLIMETERS

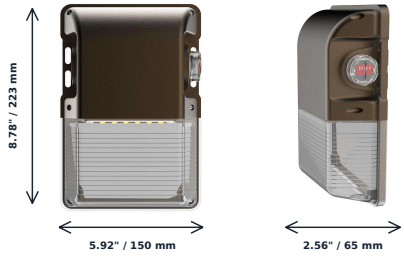

SELECTABLE CONTROLS

ACCESS BEHIND SIDE COVER

Unscrew the clear side cover to access the wattage, CCT, and photocell switches.

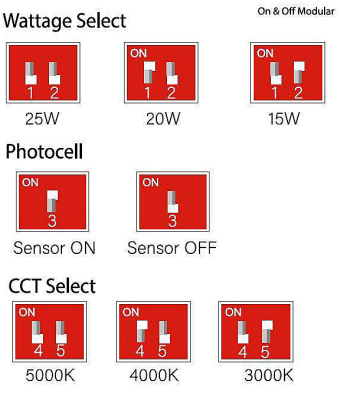

CCT Tunable 3CCT · Dimmable · JA8 COMPLIANT · ENERGY STAR®