


1X4 BACKLIT FLAT PANEL

1X4 BACKLIT

RY-PB-1X4P-3W3CCT



PROJECT

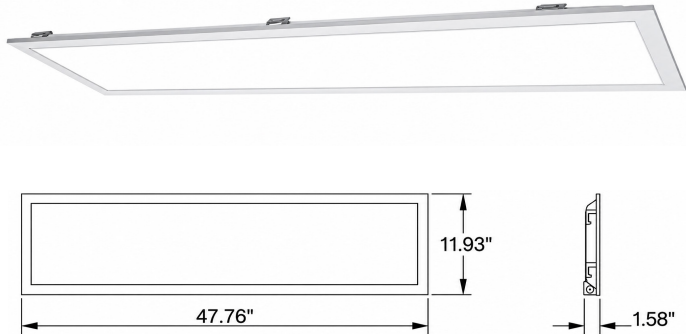

SPECIFICATION DETAILS


Input Voltage	120-277 VAC
Light Source	AC LED Module
Power	20W -30W-40W
Total Lumen 20W	2600lm
Total Lumen 30W	3900lm
Total Lumen 40W	5200lm
Color Temperature	Selectable CCT 3000K/4000K/5000K
CRI (Ra)	83+CRI
LED Rated Life	50,000 + hours
Dimming	0-10V
Lumen	130lm / watt
Beam Angle	110°
Power Factor	>0.9
Finish	Architectural White
Illumination Direction	Diffused
Construction	Aluminum
Emergency Battery	Optional (not included)
Standards	ETL Dry Locations IP20 JA8



DESCRIPTION

The LED flat panel 1' x 4' with 3CCT (Correlated Color Temperature) and adjustable wattage offers unparalleled versatility and efficiency in lighting solutions. Its innovative design allows users to tailor both the color temperature and wattage output to suit their specific needs, providing a customizable lighting experience. Whether it's warm, neutral, or cool lighting tones desired, this panel effortlessly adapts to create the ideal ambiance for any environment. Additionally, its adjustable wattage feature ensures optimal energy efficiency, allowing users to fine-tune power consumption according to requirements, ultimately saving on electricity costs while maintaining superior illumination.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

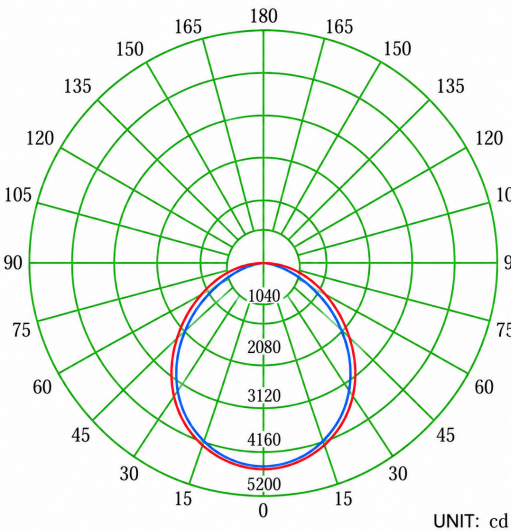

— C0-C180 — C90-C270

VERTICAL EQUILUMINOUS CURVE

