


LED POCKET WALL PACK



Product Feature

1. EXTREMELY EASY FOR INSTALLATION.WITH SURFACE MOUNTED KIT,FREE DISASSEMBLY,SIMPLE AND FAST INSTALLATION,SAVE MUCH TIME.
2. DELICATE APPEARANCE AND STRUCTURE WHICH CAN SAVE LOTS OF SHIPPING AND STORAGE COST.
3. DIE-CAST ALUMINUM COOLING DESIGN WITH BETTER HEAT DISSIPATION,LED T_J< 185°F.
4. EXCELLENT OPTICS DESIGN,GREATLY IMPROVE THE LIGHT UTILIZATION AND UNIFORMITY.
5. INTERNAL PHOTOCELL DESIGN WHICH CAN AUTOMATICALLY TURN ON AT DUSK AND TURN OFF AT DAWN, THE ENERGY IS SAVED.


Product Dimension

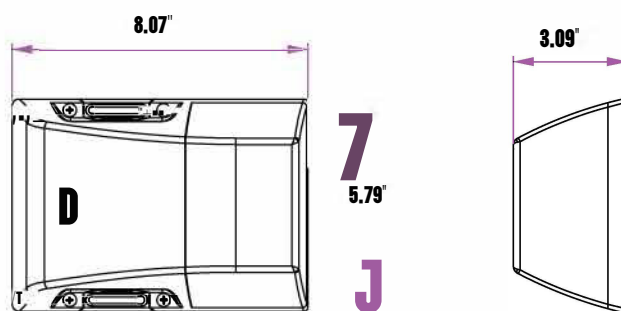





Lighting Parameters

PARK NO.	POCKET-WPK04-25W-H-TCP	POCKET-WPK04-25W-H-TCP-EM
RATE CURRENT	0.27A	U."L/A
WORKING VOLTAGE	AC100-277V	
BEAM ANGLE	90° x 140°	
COLOR TEMPERATURE	4000K,5000K,5700K	
LUMINOUS EFFICACY	110LM/W	
COLOR RENDERING INDEX	Ra>80	
OPERATING TEMPERATURE	-40°F ~ +113°F / -40°C ~ +45°C	
STORAGE TEMPERATURE	-40°F ~ +158°F / -40°C ~ +70°C	
ENVIRONMENT LOCATION	WET LOCATION	
LIFE-SPAN	≥50000H	
MATERIALS	ADC12	
THE COLOR OF THE LAMP SHELL	BROWN	
MOUNTING	BRACKET FIXED	
TURN-ON LIGHT LEVEL	< 20LUX	
TURN-OFF LIGHT LEVEL	> 50LUX	

Optical Properties

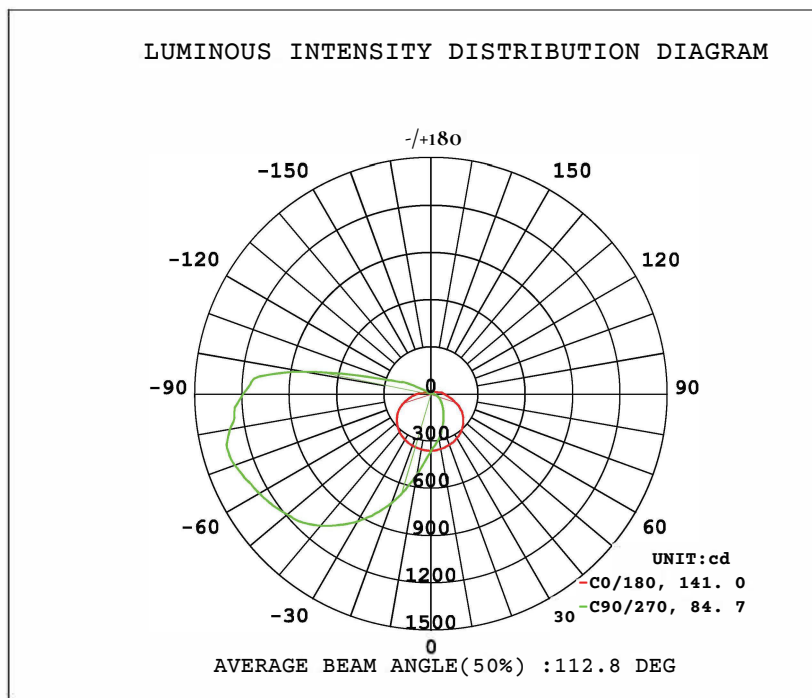


Applications

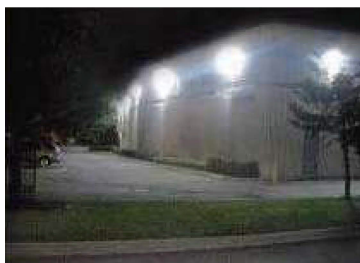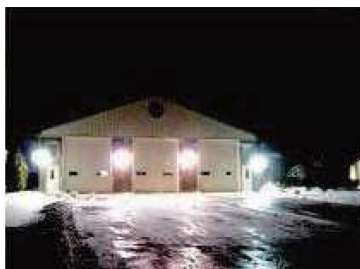


1 Disassemble the fixing screws of the lamp mounting plate with a screwdriver and remove the mounting plate;




2 After knocking out the mounting holes with a hammer (at least 2 mounting holes and they should be in a symmetrical position), press the bracket on the wall with your hand and mark with the pen at the mounting screw position;

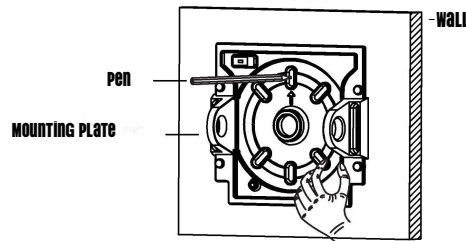

3 Use the electric drill to punch the hole at the mark position 0 8mm, depth 40mm; and use a hammer to drive the plastic expansion tube into the hole;

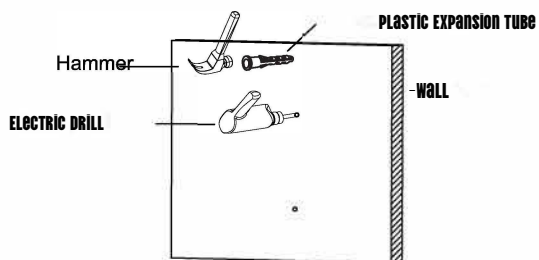

4 Fix the bracket with a screwdriver, and fix the fixture installation wire rope on the mounting plate, connect the cable as shown and do a good waterproof treatment;

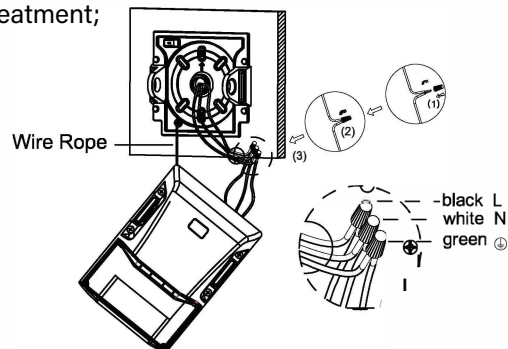

5 Put the lamp back on the mounting plate and secure the screws to complete the installation.

