RAYCOS LIGHTING

PROJECT NAME _____ DATE _____

NOTE _____

OUTDOOR FLOOD SERIES

ROCKET LED BULLET FLOOD LIGHT

SELECTABLE POWER + COLOR + BEAM



SURFACE MOUNT

120-277 VAC | cULus LISTED | TWO MOUNTING CONFIGURATIONS



GROUND STAKE

POWER
10 / 15 / 25 W

OUTPUT
UP TO 3,000 LM

COLOR
3000 / 4000 / 5000 K

BEAM
47-130 DEG ADJUSTABLE

PRODUCT FEATURES

OPTICAL + THERMAL PERFORMANCE

- Streamlined housing supports low wind resistance
- Optimized thermal design improves heat dissipation
- High-reflectance optical lens with >90% transmittance
- Adjustable beam spread: 47-70, 71-100, or 101-130 degrees
- Universal 120-277 VAC input
- Selectable 10 / 15 / 25 W output
- Selectable 3000 / 4000 / 5000 K color

APPLICATIONS

OUTDOOR + MOUNTING

APPLICATIONS

- Retail, warehouse and parking areas
- Garages and parking structures
- Basketball, tennis and badminton courts
- Football fields and large outdoor areas
- Highway and toll-station lighting

MOUNTING OPTIONS

- Ground stake
- Surface base

ORDERING GUIDE

ROCKET CONFIGURATION

Model	Selectable Power	Max Output	Selectable CCT	Input	Efficacy	Adjustable Beam
ROCKET-BFL0225-25W-TCP	10 / 15 / 25 W	3,000 lm	3000 / 4000 / 5000 K	120-277 VAC	≥120 lm/W	47°-70° / 71°-100° / 101°-130°

CRI
≥80

POWER FACTOR
≥0.9


LENS
>90% TRANS.


MOUNTING
STAKE / BASE

WARRANTY
5 YEARS

PRODUCT DIMENSIONS

ALL DIMENSIONS IN INCHES

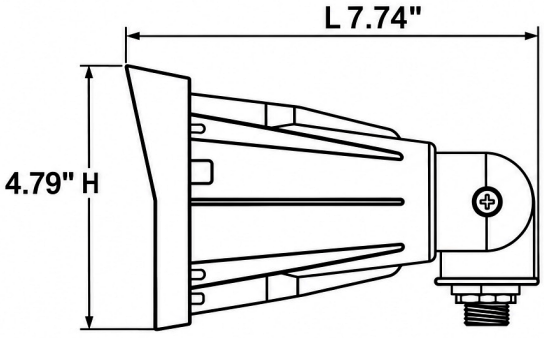



LENGTH
7.74 IN

HEIGHT
4.79 IN

WIDTH
4.8 IN

CERTIFICATION

c UL us
LISTED
E468007