



2. Instructions for Wattage Selectable 2nd Gen. WallPack with glass cover (with DIY Photocell).


1. Unscrew with a screwdriver to remove the fixture upper part.




2. Unscrew the brown cap in the side of base with a slot type screwdriver.

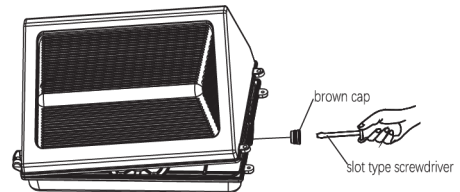


3. Screw transparent photocell into the side of base with a slot type screwdriver.

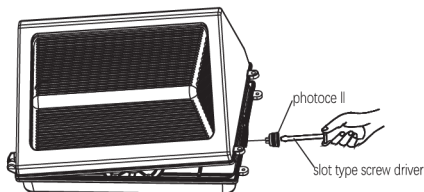

4. Open the bottom case; insert the male plug connector from driver to photocell's mating connector.

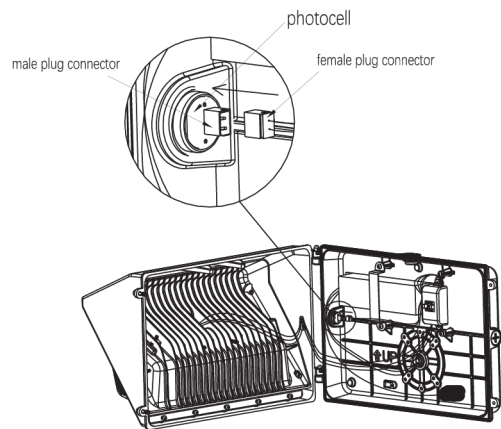

5. After connecting the light sensor, set the CCT and power value through the internal dial switch(internal DIP switches).
According to the label, the default color temperature switch is 4000K, dial upward to 3000K, dial downward to 5000K, and dial to 4000K in the middle. The default power switch is 80W, dial upward to position 60W, dial downward to 100W, and dial to 80W in the middle; users can dial to the desired CCT and power value.

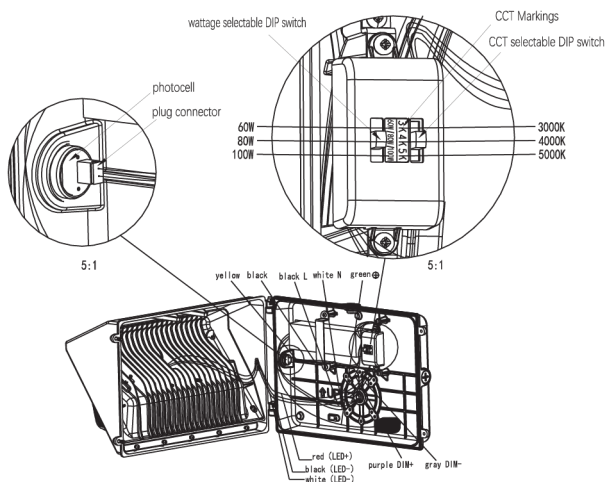

6. After selecting the CCT and wattage, lock the upper part by tightening screws into bottom case for the end.

