

Catalog Number :

Project Name :

Note :


Date :

Type :

EX-COMBO-W

DESCRIPTION

The indoor combo exit light is a reliable and energy-efficient emergency lighting solution, ideal for commercial and residential buildings. Featuring a built-in 90-minute battery backup, it ensures continuous illumination of the exit sign and integrated emergency lights during power outages. This versatile fixture offers selectable red or green lettering, allowing for easy customization to meet code requirements or design preferences. Compact and easy to install, it provides both exit signage and emergency lighting in one unit. UL listed for safety and performance, it meets essential building codes and offers dependable operation when it matters most.

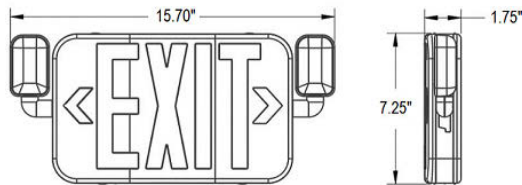

SWITCH TEST

- In AC operation, press the test button to test in emergency mode.
- In an emergency operation, press the test button but it does not work.

TECHNICAL SPECIFICATION

INPUT WATTAGE	120/277 VAC 60Hz
BATTERY	Maintenance free 3.6V 1000mAh
BATTERY TYPE	NiCad
CHARGING TIME	>24 HOURS
ILLUMINATION	Long-life, high-intensity LEDs
DISCHARGE TIME	90 Min
LEGEND	Fully illuminated 6" Characters
HOUSING	Molded thermoplastic ABS HOUSING
OPERATING TEMP	32°F to 104°F
SAFETY	Meets NFPA 101 Safty
FINISH	White
WATTAGE	4.8W
NOTE	NEC, OSHA
VERSETILITY	Selectable single-/double-face
DIMENSIONS	15.70"x1.80"x7.30"
LED INDICATOR	Red or Green indicator
OPERATING TEMP	(32°F~ 104°F) 0~40°C
RATING	UL 924 and CEC Title 20
WARRANTY	5 year limited

INSTALLATION

Wall & Ceiling. Sides, back and top mounting option

KEY FEATURES

- Selectable Single and Doubleface
- 90 min Battery
- Selectable Green or Red Letters

ELECTRICAL

This fixture is built with the highest quality 120V drivers, ensuring energy efficiency.

EMERGENCY HEADS

2X2.4W fully adjustable heads

LISTING

UL listed for damp locations

