RAYCOS LIGHTING

PROJECT NAME	DATE	NOTE

POCKET EXTERIOR WALL-MOUNT SERIES

POCKET MINI WALLPACK

COMPACT DUSK-TO-DAWN WALL LIGHT | STANDARD + EMERGENCY



COMPACT DIE-CAST ALUMINUM HOUSING

- Internal photocell turns on at dusk and off at dawn
- High-uniformity optical system for area illumination
- Surface-mount bracket supports fast installation
- Wet-location design with standard and emergency models

POWER
25 W

EFFICACY
110 LM/W

COLOR
4000 / 5000 / 5700 K

PHOTOCELL
DUSK-TO-DAWN

PRODUCT FEATURES


COMPACT + EFFICIENT

- Removable housing and surface-mount kit simplify installation
- Compact profile reduces shipping and storage volume Die-cast
- aluminum cooling design improves heat dissipation LED
- junction temperature designed below 185°F Optical system
- improves light utilization and uniformity Internal photocell
- conserves energy automatically

UL LISTED · DLC LISTED PREMIUM · Wet Location · CCT Selectable · Dimmable · JA8 COMPLIANT

PRODUCT DIMENSIONS

INCHES

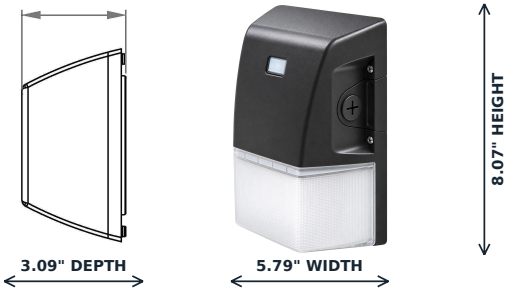

ORDERING GUIDE

STANDARD + EMERGENCY

Model	Version	Current	Input	CCT	Finish
POCKET-WPK04-25W-H-TCP	Standard	0.27 A	100-277 V	4000 / 5000 / 5700 K	BZ
POCKET-WPK04-25W-H-TCP-EM	Emergency	0.27 A	100-277 V	4000 / 5000 / 5700 K	BZ

POWER
25 W

CRI
>90

BEAM
90° x 140°

INPUT
100-277 V

LOCATION
WET


TECHNICAL DATA

POCKET SERIES

Beam angle	90° x 140°
Efficacy	110 lm/W
Operating	-40°F to +113°F (-40°C to +45°C)
Storage	-40°F to +158°F (-40°C to +70°C)
Environment	Wet location
Life	≥ 50,000 hours
Material	ADC12 die-cast aluminum
Mounting	Bracket fixed
Photocell	ON below 20 lux / OFF above 50 lux

PHOTOMETRIC REPORT

112.8° AVG. BEAM

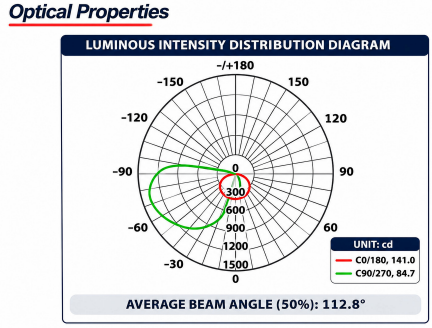

Reference polar distribution from the supplied report.