


BEAM 4FT LED HIGH BAY

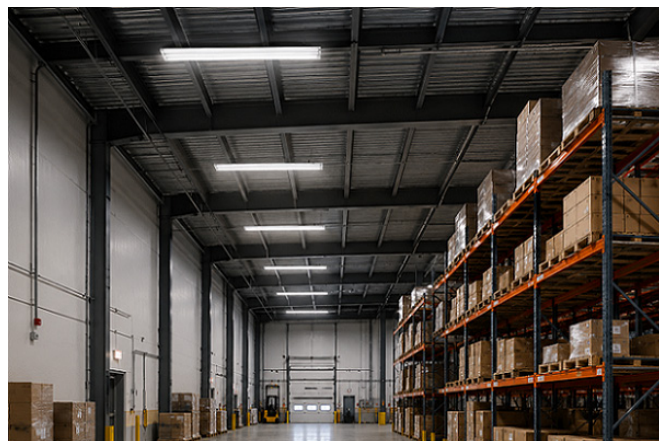

Accessories(Included)

Image	Description
	Hook
	Chain

Features

- LED linear high bay lights replace traditional fluorescent and metal-halide high bays, offering an operating temperature range of -40° to 122° F (-40° to 50° C).
- IP20 rated, suitable for damp locations, with lumen maintenance over 70% at 50,000+ hours and a beam angle of 110°.
- Features a white finish with an aluminum heatsink for efficient heat dissipation.
- Equipped with a frosted or prismatic (varies by model) PMMA lens for smooth 5000K light diffusion.

Ordering Guide

Model No			RY-LHB-220W4FT-H-3W3CCT		
Length			4FT		
Watt			220/190/160W		
CCT			3500-4000-5000K Selectable		
CRI			>80		
Power Factor			≥0.9		
Lumens			30800lm @220W		
Recommended Installation Height			16-26ft		
Dimmable			0-10V		
Voltage			AC 120-277V		
DLC#			S-FESPTK		

Options Ordering Guide

Model No	RY-LHB-220W4FT-H-3W3CCT				
	(BEAM) ANT-5-4T Microwave Motion Sensor				
Motion Sensor (Max 40ft)	(BEAM) ANT-6-4T PIR Motion Sensor Bi Level				
Motion Sensor (Max 50ft)	(BEAM) HD09VR-MH-1: Microwave, ON/Off or Bi Level and Daylight Harvesting				
Emergency Driver	BLD-HM25D-480800				