


Product Dimension

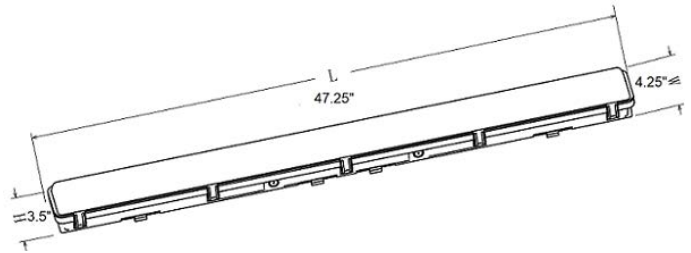

Introducing the Vapor Tight: The LED Vapor Tight fixture, rated for wet locations, offers a durable and versatile lighting solution suitable for a wide range of indoor and outdoor environments. Its robust construction ensures durability and reliability, making it ideal for areas exposed to moisture, dust, and harsh weather conditions. With selectable wattage options of 3500W, 4000W, and 5000W, along with a luminous efficacy of 140 lumens per watt (lm/W), this fixture provides high-efficiency lighting that can be customized to meet specific brightness levels and energy consumption preferences. Whether used in parking garages, industrial facilities, car washes, or outdoor walkways, the Vapor Tight delivers reliable performance, energy efficiency, and versatility—making it an essential component of any lighting project.

Specification

Part No.	Power	Input Voltage	Luminous	Luminous Efficacy	CCT	Viewing Angle	Ra	PF	Warranty
VP-TPL3-4FT50W-TCP	30/40/50W	AC120-277V	7000lm	140lm/W	3500K	120°	>80	>0.9	5 Years
VP-TPL3-4FT50W-TCP-MS	30/40/50W		7000lm		4000K				
VP-TPL3-4FT50W-TCP-EM	30/40/50W		7000lm		5000K				

Features

- Universal Voltage: 120-277V or 120-347
- ETL Universa
- IP66, IK08, and 850° glow wire test requirement.
- 5-year warranty.

Testing Report

