


## VAPOR TIGHT SERIES

**8 FT VAPOR TIGHT**
**HIGH OUTPUT + COLOR SELECTION**


IP66 | IK08 | WET LOCATION | ETL LISTED


**LENGTH**  
**8 FT**
**WATTAGE**  
**70 W**
**OUTPUT**  
**7,000 LM**
**COLOR**  
**3500 / 4000 / 5000 K**
**PRODUCT DIMENSIONS**

8 FT HOUSING

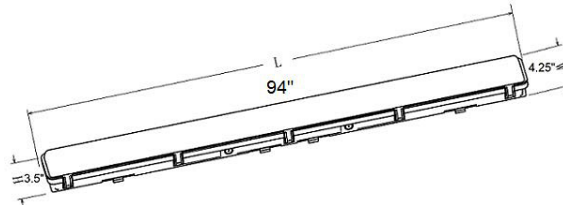

94" L x 4.25" W x 3.5" H

**PERFORMANCE**

HIGH EFFICIENCY

**EFFICACY**  
**140 LM/W**
**BEAM**  
**120 DEG**
**CRI**  
**>80**
**WARRANTY**  
**5 YEARS**
**PRODUCT OVERVIEW**

LONG-RUN WET-LOCATION LIGHTING

The 8 FT Vapor Tight is a rugged wet-location LED linear fixture designed for broad, continuous coverage in moisture, dust, and demanding commercial environments. Its sealed housing combines 70 W operation with 3500/4000/5000 K color selection for dependable indoor or outdoor use.

- IP66 wet-location protection and IK08 impact resistance
- 120-degree beam; CRI >80; power factor >0.9
- 120-347 V input; 120-277 V platform also available
- 850 C glow-wire test requirement and ETL listing
- 5-year limited warranty

**ORDERING GUIDE**

8 FT CONFIGURATIONS

| Model                 | Wattage | CCT              | Lumens   | Efficacy | Voltage   | Configuration |
|-----------------------|---------|------------------|----------|----------|-----------|---------------|
| VP-TPL3-8FT70W-TP     | 70 W    | 3500/4000/5000 K | 7,000 lm | 140 lm/W | 120-347 V | Standard      |
| VP-TPL3-8FT70W-TCP-MS | 70 W    | 3500/4000/5000 K | 7,000 lm | 140 lm/W | 120-347 V | Motion Sensor |

Values shown reproduce the supplied 8 FT specification data.


VAPOR TIGHT SERIES

PHOTOMETRICS & APPLICATIONS

LUMINOUS INTENSITY

POLAR DISTRIBUTION


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

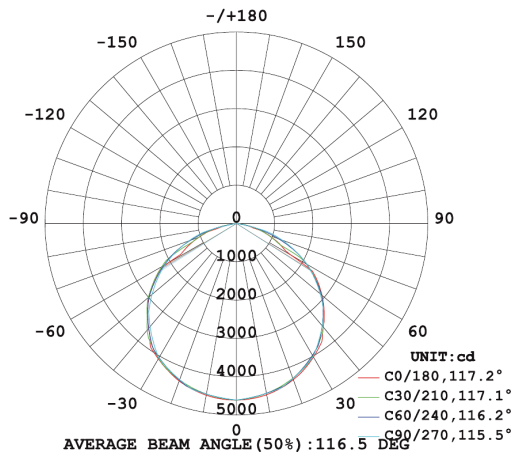

ISOLUX DIAGRAM

C0 PLANE

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

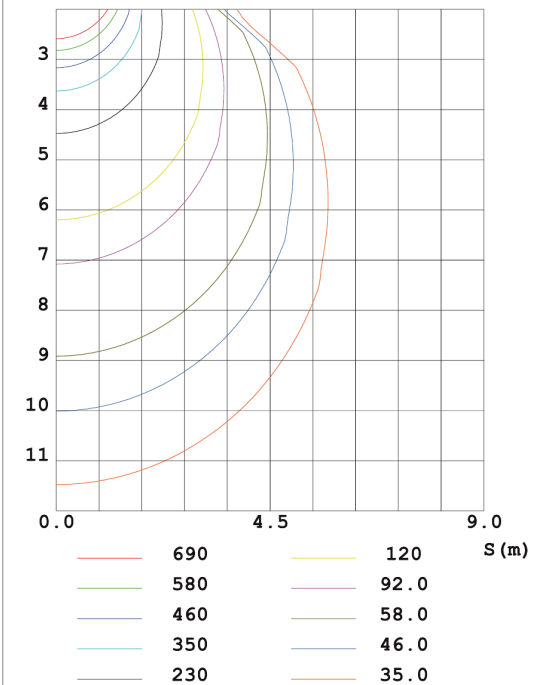

PHOTOMETRIC SUMMARY

MEASURED DISTRIBUTION

AVERAGE BEAM  
116.5 DEG

C0 / C180  
117.2 DEG

C30 / C210  
117.1 DEG

C60 / C240 | C90 / C270  
116.2 | 115.5 DEG

RECOMMENDED APPLICATIONS

INDOOR + OUTDOOR

1 PARKING GARAGES

Sealed, efficient illumination for damp or dusty vehicle areas.

2 INDUSTRIAL FACILITIES

Durable linear lighting for production and utility spaces.

3 CAR WASHES

IP66 protection for moisture-intensive commercial environments.

4 OUTDOOR WALKWAYS

Wide 120-degree distribution for covered exterior circulation.

Photometric diagrams and beam-angle values reproduced from the supplied testing report.