


PLANO LED

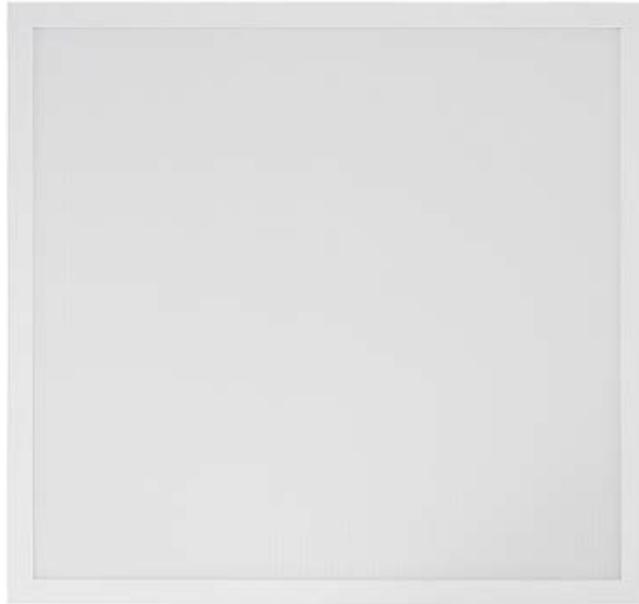

Product Features

- **Back-lit Design:** The panel light boasts a sleek and attractive appearance.
- **High-Quality Materials:** Ensures excellent heat dissipation and minimal light degradation over time.
- **Efficient Driver:** With an efficiency rating of over 86% and a power factor (PF) greater than 0.9.
- **Long Lifespan:** Rated for over 50,000 hours of use.
- **0-10V Dimming Function:** Includes a dimming driver for adjustable brightness.
- **Dustproof Construction:** The zero-gap design between the back cover and frame ensures dust protection.
- **Adjustable CCT:** Color temperature can be adjusted between 3500K, 4000K, 5000K, 5700K, and 6500K.
- **Power Adjustable:** Offering flexibility to meet various lighting needs.
- **Connection:** AC and DC wires should be connected separately to the driver input.


Specification

Product Model	Power	Lumen MAX	Input Voltage	Luminous Efficacy	CCT	Viewing Angle	Ra	Dimmable	Warranty
PLANO-2X2-40-TCP	20W/25W/30W/35W/40W	4400lm	AC100-277V	110lm/W	3500K / 4000K / 5000K / 5700K / 6500K	120°	≥80	0-10V	3 years
PLANO-2X2-40-TCP-EM	20W/25W/30W/35W/40W	5500lm							
PLANO-2X4-40-TCP	20W/25W/30W/40W/50W	5500lm		125lm/W					
PLANO-2X4-40-TCP-EM	20W/25W/30W/40W/50W	5500lm							
PLANO-1X4-40-TCP	20W/25W/30W/35W/40W	4400lm							
PLANO-1X4-40-TCP-EM	20W/25W/30W/35W/40W	4400lm	AC100-347V	110lm/W					
				125lm/W					


Note: Above is the normal parameters, the following functions can be achieved according to customers requests.

Emergency panel light: emergency power is 4-20W, emergency time is 1.5-2h, for all the above specifications.


2X2

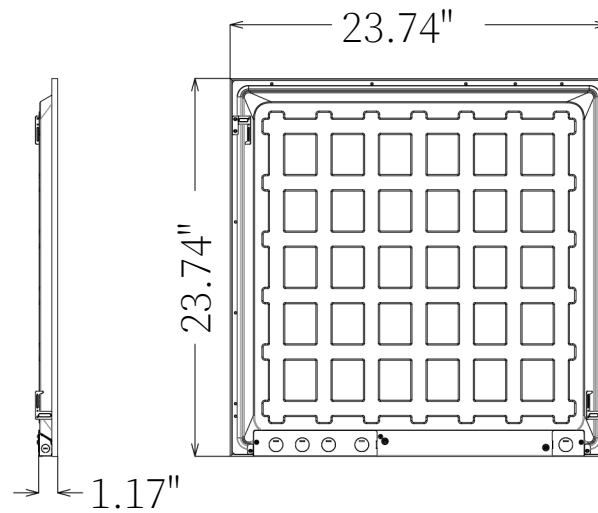



2X4

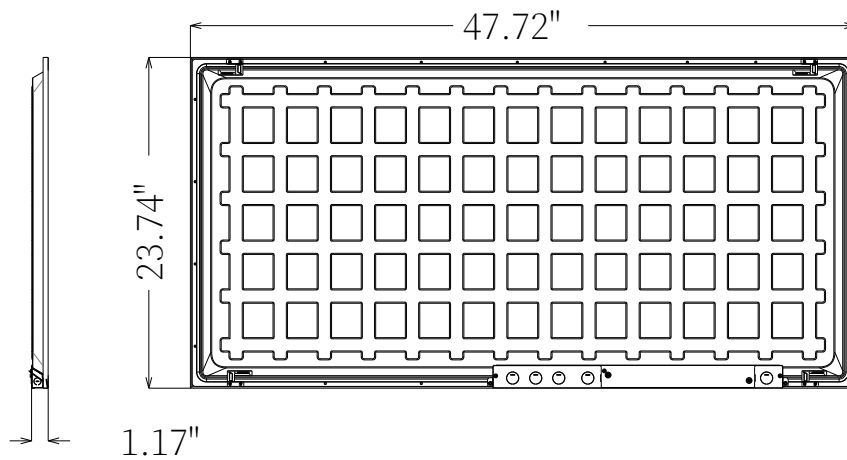





1X4

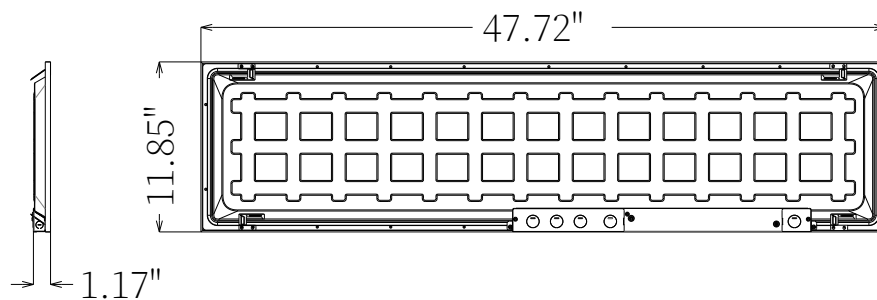




Recessed Installation

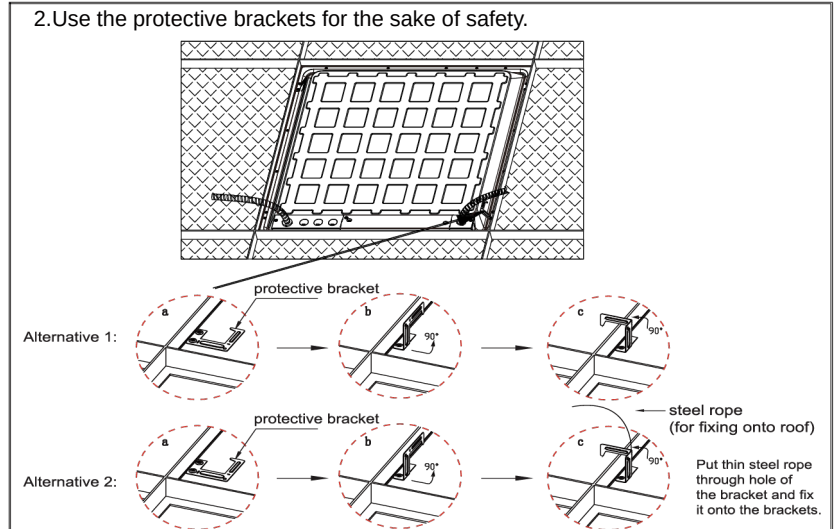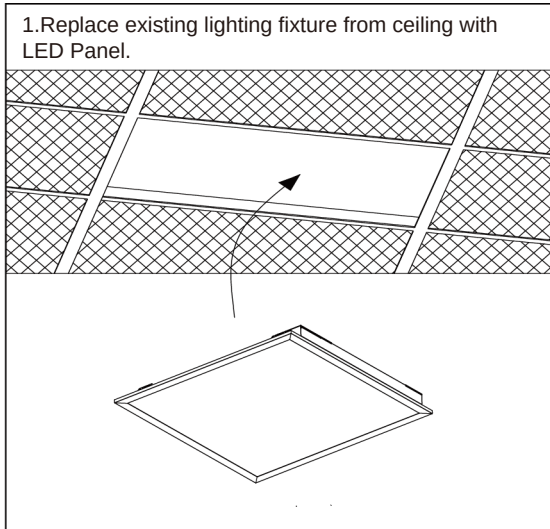

Installation Guide

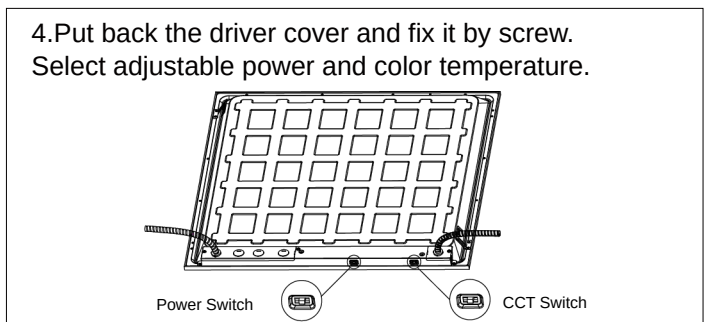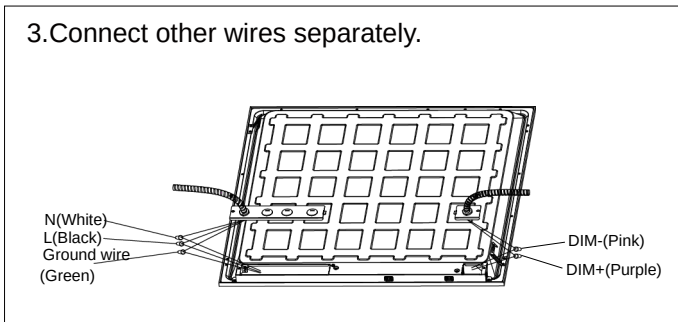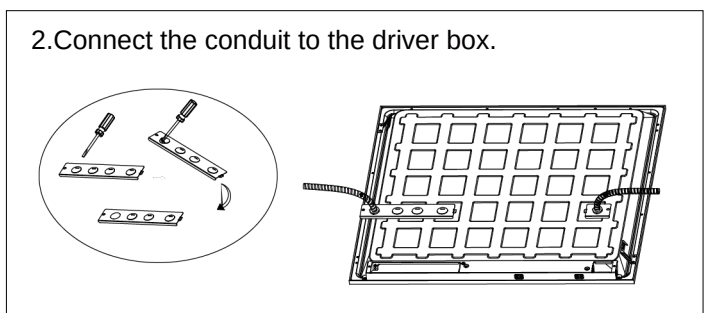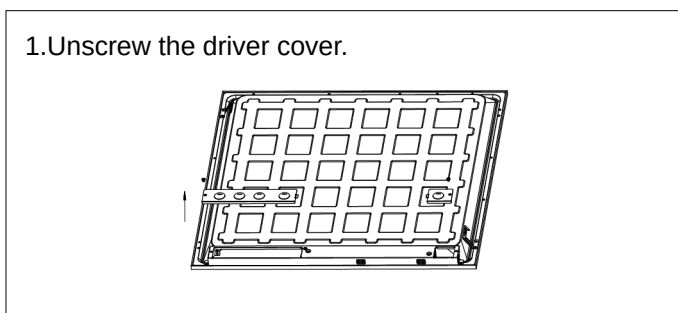

Suspension kit Installation

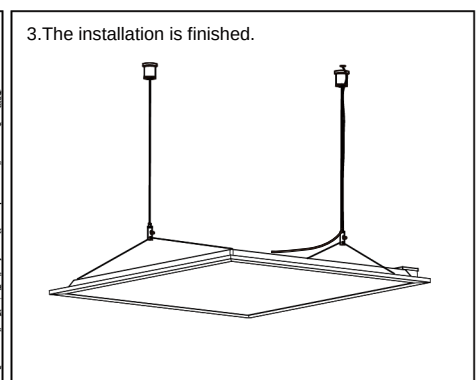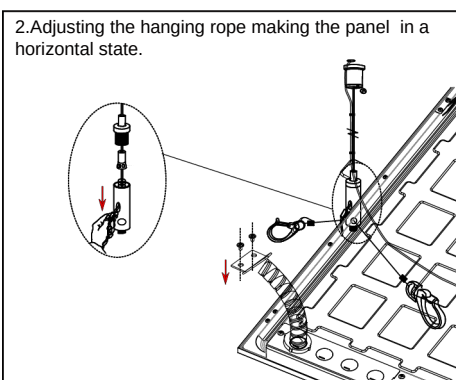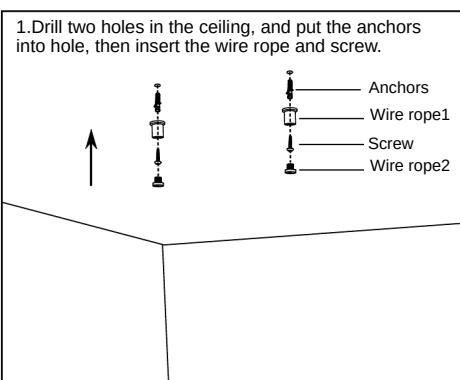

Note: 2*2/1*4/2*4ft: 2 pcs suspension kits needed for installation.