


D	roi	iect	N	lar	$\mathbf{n}\mathbf{n}$
Г	IUI	iect	1.1	a	ne

Date:

Note:

Red Combo LED Exit Sign and Emergency Light Combo

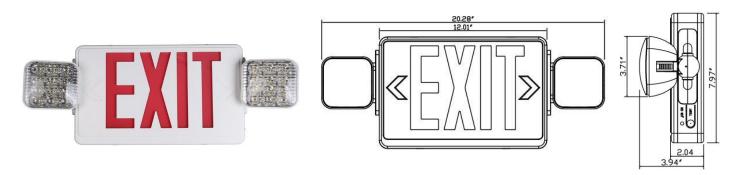

FEATURES

- High impact flame retardant high thermos and color stable UL 94-5VA rated polycarbonate
- Snap-fit construction to enable fast installation
- Perfect option for applications requiring an Exit sign and emergency light in the same area
- Wall or top mounted

ELECTRICAL

- UL924 Listed
- UL Damp Location Rated
- Dual 120/277 voltage. Optional multi-tap voltage available
- 2 x 2.2W LAMP HEADS SMD 2835 LEDs
- Built-in 9.6V700mAH rechargeable Ni-cd battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator

SPECIFICATION

Model No.	RY-EXLCOMB01RED		
Voltage	120/277v 60 Hz		
Finish	White Finish / Red Sign		
Emergency Time	90 Minutes with 6.0V Ni-Cad Battery		
Lumens	247 lm		
Wattage	3.0W@ 120v; 3.7W@ 277V		
Operating Temperature	32°F ~+104°F / 0°C~+40°C		
Package Info	20.1x12.4x17.1		
PC/ Master Pack	6 PCS		
Weight	25 LB		