

Catalog Number : Project Name : Note : Date : Type :

DESCRIPTION

5CCT LED Downlight Retrofit Kit uses DOB solution technology. It has a classic, low-profile design which allowing users to have a stylish look with efficient lighting. Can be install into any indoor 4"/5"/6" housing.

Light to 2700K warm white, 3000K soft white, 3500K natural white, 4000K cool white, or 5000K bright white.

With a damp location rating, this unit is ideal for new and old construction, remodels, soffit, eaves, shower etc. Ideal for bedroom, kitchen, bathroom, living room, garage, basement, patio, porch, closet and more etc.



BASED ON SAMPLE SETTING. ACTUAL LUMENS MAY VARY.

MODEL#	WATTAGE	5CCT	LUMENS
TR4SR-WH	9W	2700K	690Lm
		3000K	753Lm
		3500K	773Lm
		4000K	785Lm
		5000K	789Lm

MODEL#	WATTAGE	5CCT	LUMENS
TR6SR-WH	12W	2700K	865Lm
		3000K	887Lm
		3500K	900Lm
		4000K	917Lm
		5000K	930Lm

TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	100°
MATERIAL	Composite
LIFESPAN	≥50,000hours
OPERATING TEMP	(-4°F~ 113°F) -20~45°C
DIMMABLE	Triac Dimming
RATING	Damp / Wet Locations
WARRANTY	2 year limited

FEATURES

- Retrofits in existing incandescent can housing
- Optional E26 screw base adapter connects directly to standard socket
- 90+ CRI, superior color rendering performance
- Smooth Trim

DIMMING

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

ENERGY SAVINGS

80% more energy savings than halogen lamps.

INSTALLATION

Easy installation with universal E26 connectors. Fit 4" , 5" and 6" compatible housings.

LIFESPAN

This luminaire is built with the highest quality 120V drivers, ensuring energy efficiency. With a lifespan of 50,000 hours, it can last decades under normal operation!

LISTING


ETL Listed. Energy Star. JA8. Title24.



Catalog Number : Project Name : Note : Date : Type :



Selectable CCT
2700K,3000K,3500K,4000K,5000K

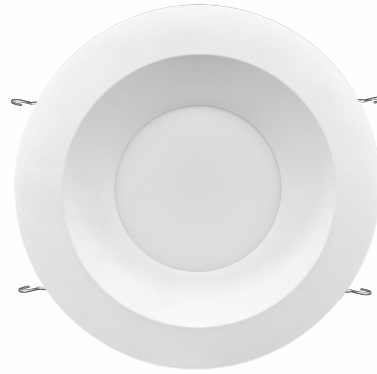

SIZE & DIMENSION



RECOMMENDED DIMMER

LUTRON		LEVITON
TG-600PR-WH	SCL-153PH-WH	6672
S-600PR-WH	GT-600P	6674
CTCL-153PDH-WH	DVCL-153P	DSL06
TGCL-153PH-LA	PD-6WCL	RNL06
SLV-600P-AL	MSCL-OP153M	IPL06
DV-600PR-WH	MACL-153M//MA-R	

ACCESSORIES



E26 Adapter