

FEATURES

1. Fins design, advective holes and grooves in each fin, good for heat dissipation;
2. The wide input voltage range AC120-277V/120-347V(0-10V dimming);
3. Professional light distribution technique, high light reflectivity reflectors, 60°/120° beam angle available; The lens pass rate is over 90%
4. Light weight and small size, save about half shipping costs.

APPLICATIONS

Warehouse, Factory, Exhibition Room, Gas Station, Supermarket etc.





Reflector



Built in sensor base
Easy Twist on Sensor Install


UFO02-300W-H-3W3CCT

DIMENSIONS

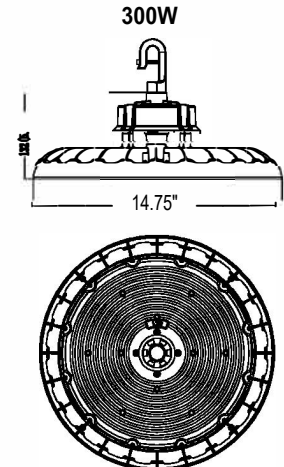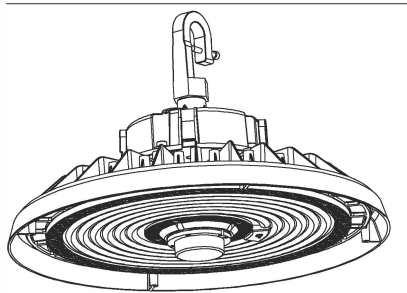


PHOTOMETRIC REPORT

UFO02-300W-XX-3WXX(XX)
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

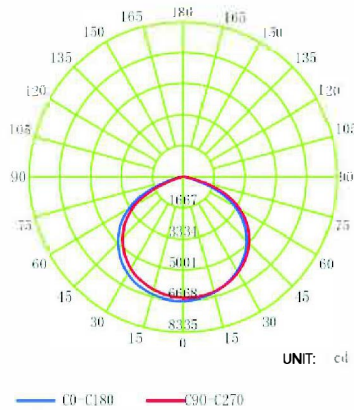

VERTICAL EQUILUMINOUS CURVE

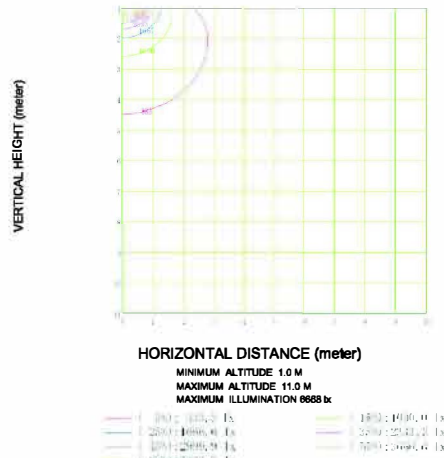


LIGHTING PARAMETERS

Model	UFO02-300W-H-3W3CCT
Wattage	280W/280W/300W
Working Voltage	AC120-277V/AC120-347V
CCT	3500K/4000K/5000K
Lamp Bead Model	2835
Beam Angle	120°/90°/80°
Lighting Efficiency	140LM/W
Lumens	36400LM / 39200LM / 42000LM
Color Rendering Index	Ra>80
Operating Temperature	-25°C ~+45°C/-13°F ~+113°F
Storage Temperature	-25°C ~+70°C/-13°F ~+158°F
Environment Location	Wet Location
Life span	≥50000H

INSTALLATION INSTRUCTION


Hook type:

1.Lock the hook.




2.Tighten the screw.


(This step can be omitted if there is no screw hole.)

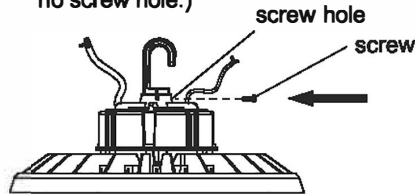

3.Hang up the light.




4.Lock the screw.

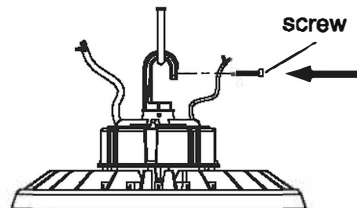
WIRING CONNECTION


Turn off the power, connect AC wire. black wire to L, white wire to N, and green wire to E.

Dimmer connection (With dimmable driver.)

- Compatible with 1-10V dimming.
- Connect wires as below, purple wire is D +, gray wire is D -, cap black wire.

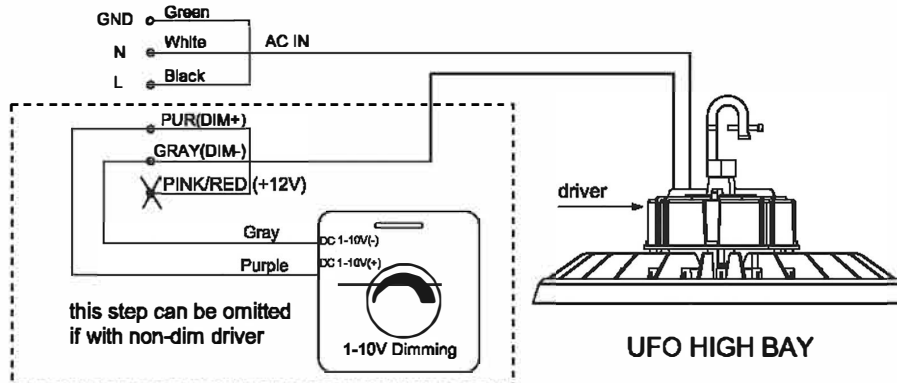


ADJUSTABLE CCT AND ADJUSTABLE WATT

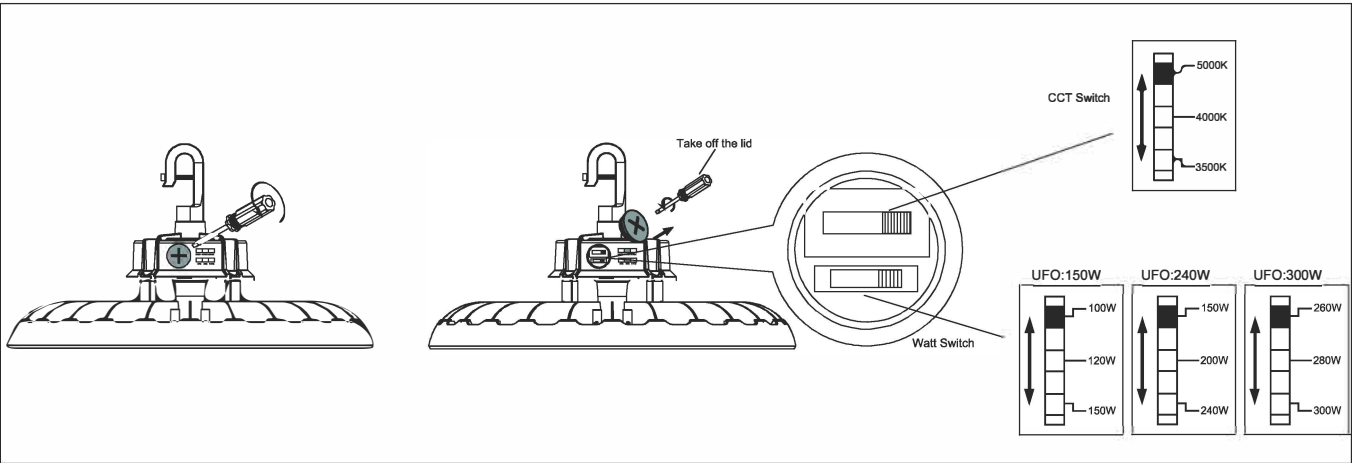

NOTE: After adjustment, please close the lid and tighten it to prevent dust and water from entering the lamp body !

INSTALLATION OF SENSORS

- NOTE:**
 1. Please remove the sealing ring on the sensor before installation
 2. The sensor should be tightened to prevent dust and water from entering the lamp body!

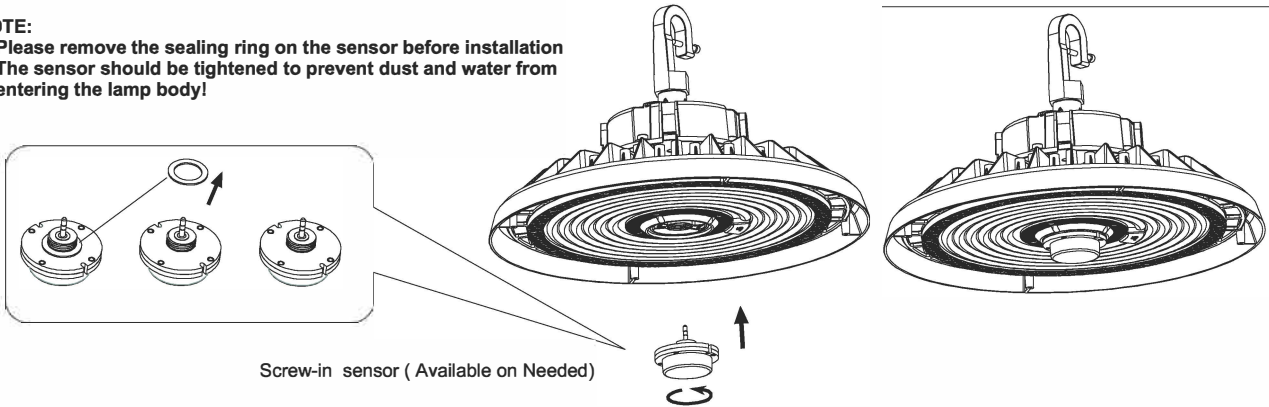

PACKING INFOMATION

Model No.		UFO02-300W-XX-3WXX(XX)
Qty/Pack		1 PCS
Package Size		390X380X135mm
		15.4"X14.9"X5.3"
Package Weight		4.28 kg/9.44 lbs
Package CBM		0.020007

NOTE

- Any form of installation/uninstallation or maintenance and electrical work must only be performed by a qualified electrician.
- All wiring should be done after cutting off the power.
- The UFO high bay light must be grounded.
- Always keep the lens/diffuser of UFO high bay light cleaned to maintain good light transmission.
- Always keep the shell of UFO high bay cleaned to maintain good heat dissipation.
- Cleaning must only be done with dry or wet cloth and the high
- High voltage inside the fixture, please do not disassemble it. Serious electric shock may occur otherwise.

