


Catalog Number:      Project Name:      Note:      Date:      Type:

REMOTE-2H-WET

## DESCRIPTION

The RAYCOS Lighting remote LED emergency head is a high-performance solution designed to extend emergency egress illumination when connected to a compatible central battery unit. Engineered for durability and reliability, it is UL listed and suitable for wet location applications, ensuring safe operation in outdoor, wash-down, and moisture-prone environments. Featuring energy-efficient, long-life LED technology, the remote head delivers consistent illumination during power outages while maintaining low power consumption. Operating on a wide DC input range of 3V to 24V, it offers flexible compatibility with various emergency lighting systems. |

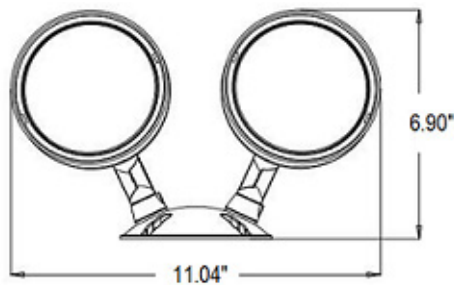

## BENEFITS

- Fully adjustable lamp head
- DC 3.6-24V universal input

## TECHNICAL SPECIFICATION

WATTAGE	<b>4.8W</b>
INPUT VOLTAGE	<b>3.6-24V DC</b>
POWER FREQUENCY	<b>60Hz</b>
POWER FACTOR	<b>&gt;0.9</b>
Mounting	<b>Flame, Fire-resistant</b>
Finish	<b>White</b>
BEAM ANGLE	<b>120°</b>
MATERIAL	<b>Thermo plastic ABS Housing</b>
LIFESPAN	<b>≥60,000hours</b>
DIMMABLE	<b>NA</b>
INPUT RATING	<b>N</b>
BATTERY CAPACITY	<b>Remote</b>
EMERGENCY TIME	<b>N</b>
INITIAL CHARGE TIME	<b>N/L</b>
BATTERY TYPE	<b>N/L</b>
LED INDICATOR	<b>N/L</b>
OPERATING TEMP	<b>(32°F~ 104°F) 0~40°C</b>
RATING	<b>Suitable for Wet Locations</b>
WARRANTY	<b>5 year limited</b>

## INSTALLATION

Wall mounting or ceiling mounting

## CERTIFICATION

UL 924 listed for damp locations. It meets NFPA 101 life safety code, NEC, OSHA, California Energy Commission (CEC) Title 20 Compliant

## FEATURE

DC 306-24v universal input

## ENERGY SAVINGS

60% more energy savings than PL lamps.

## LISTING

UL Listed for wet locations

