

PLUG AND PLAY PHOTOCELL

RY-ANT-5-4T-PC






PROJECT

SPECIFICATION DETAILS

| | |
|----------------------------|---|
| Rated Voltage | 12-24V DC |
| Rated Frequency | 50mA+-5% |
| Power consumption | 0.4W max |
| Operate Level | 16Lux On / 24Lux Off |
| Ambient Temperature | 99% RH |
| Temperature | -40°F ~ + 158°F (-40°C ~ + 70°C) |
| Listing | UL Listed for Damp and Wet Locations UL773A |

DESCRIPTION

The ANT-4T-PC photocell is a reliable lighting control solution designed specifically for street lighting applications. Engineered with a wide voltage range, it offers excellent compatibility for various commercial and outdoor lighting systems. Featuring a preset 5-second time delay, the ANT-4T-PC helps prevent false switching and misoperation caused by temporary light changes. Ideal for street lights, shoebox fixtures, and area lighting, this photocell delivers dependable automatic control for enhanced energy efficiency and convenience. The ANT-4T-PC is UL listed under certification number UL113A, ensuring trusted safety and performance.

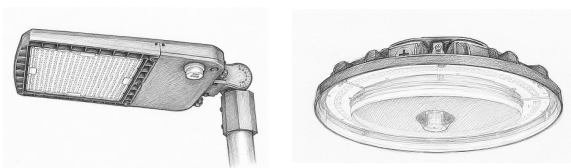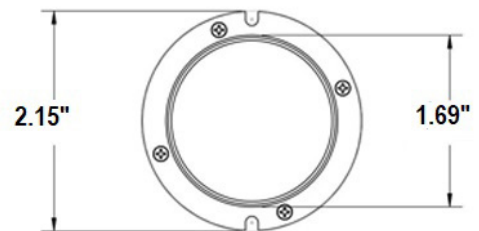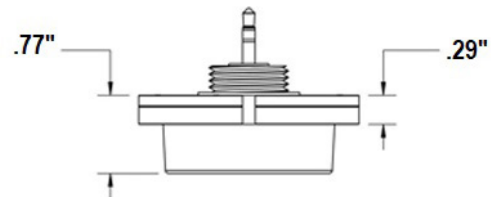

COMMENT

