
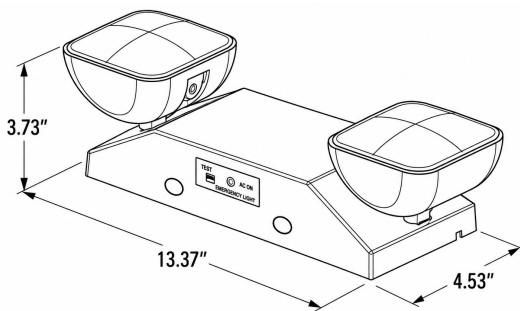


DESCRIPTION

This indoor LED emergency light provides dependable illumination during power outages and emergency conditions. Equipped with a built-in rechargeable battery, it delivers up to 90 minutes of emergency operation when normal power is lost. The fixture is UL Listed for safety and reliability, making it a practical choice for offices, hallways, commercial buildings, retail spaces, and other indoor egress applications

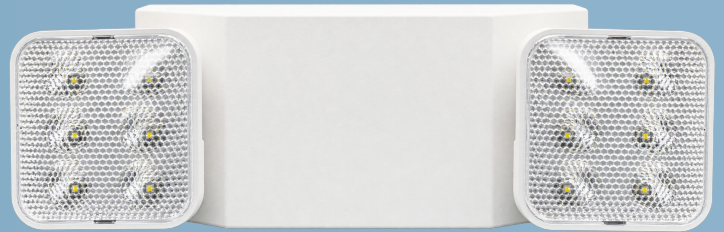

SWITCH TEST

- In an emergency operation, press the test button to see the battery operation,
- 90 Min Battery

TECHNICAL SPECIFICATION

WATTAGE	2 x 1.2W
VOLTAGE	120/277V AC
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
Mounting	Wall / Ceiling
Finish	White
BEAM ANGLE	100°
MATERIAL	Thermo plastic ABS Housing
LIFESPAN	≥60,000hours
DIMMABLE	NA
INPUT RATING	5W, 50Ma
BATTERY CAPACITY	3.6V 1000mah Ni Cad Battery
EMERGENCY TIME	90Min
INITIAL CHARGE TIME	24Hours
BATTERY TYPE	2 X 4.8V NiCad BATTERY
LED INDICATOR	Green / Red
OPERATING TEMP	(32°F~ 104°F) 0~40°C
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

INSTALLATION

Wall mounting or ceiling mounting

CERTIFICATION

UL 924 listed for damp locations. It meets NFPA 101 life safety code, NEC, OSHA, California Energy Commission (CEC) Title 20 Compliant

FEATURE

2 X 1.2w
UL-94-VO flame-retardant, fire-resistant

ENERGY SAVINGS

80% more energy savings than Halogen lamps.

LISTING

UL Listed. 924 CEC Title 20 Compliant

