

Catalog Number :

Project Name :

Note :


Date :

Type :

RY-BICOLOR-EXLCOMBO

DESCRIPTION

This bi-color LED exit/emergency combo light provides clear, reliable egress identification with selectable red or green EXIT lettering and integrated emergency lighting heads. Equipped with a built-in emergency battery backup, the unit automatically provides illumination during a power failure, making it a practical solution for commercial, retail, office, and other life-safety applications.

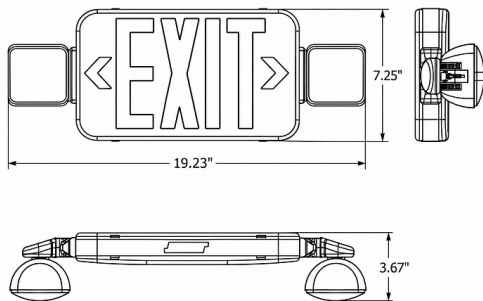

SWITCH TEST

- Universal field-selectable single / double-face .
- In an emergency operation, press the test button to see the battery operation,
- 90 Min Battery

TECHNICAL SPECIFICATION

WATTAGE	2 x 2.4W
VOLTAGE	120/277V AC
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
Mounting	Wall / Ceiling
Finish	White
BEAM ANGLE	100°
MATERIAL	Thermo plastic ABS Housing
LIFESPAN	≥60,000hours
DIMMABLE	NA
INPUT RATING	5W, 50Ma
BATTERY CAPACITY	3.6V 1800mah Ni-Mh
EMERGENCY TIME	90Min
INITIAL CHARGE TIME	24Hours
BATTERY TYPE	2 X 4.8V NiCad BATTERY
LED INDICATOR	Green / Red
OPERATING TEMP	(32°F~ 104°F) 0~40°C
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

INSTALLATION

Wall mounting or ceiling mounting

CERTIFICATION

UL 924 listed for damp locations. It meets NFPA 101 life safety code, NEC, OSHA, California Energy Commission (CEC) Title 20 Compliant

FEATURE

2 X 2.4W Fully adjustable heads
UL-94-VO flame-retardant, fire-resistant
Fully illuminated 6" Characters

ENERGY SAVINGS

60% more energy savings than PL lamps.

LISTING

UL Listed. 924 CEC Title 20 Compliant

