


Catalog Number : Project Name : Note : Date : Type :

EX-COMBO-R

DESCRIPTION

The indoor combo exit/emergency unit by Raycos Lighting is a reliable, all-in-one life safety solution designed for both functionality and durability. Featuring an illuminated exit sign paired with integrated emergency lighting, it ensures clear visibility and safe egress during power outages. Its versatile design allows for both wall and ceiling mounting, making it suitable for a wide range of commercial and residential applications while maintaining a clean, professional appearance.

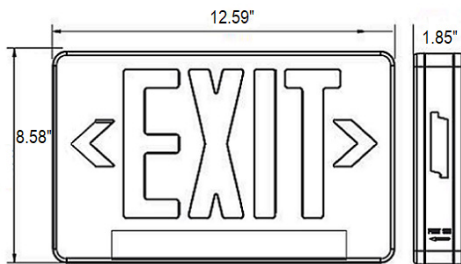

SWITCH TEST

- In AC operation, press the test button to test in emergency mode.
- In an emergency operation, press the test button to see the battery operation,

TECHNICAL SPECIFICATION

WATTAGE	3W
VOLTAGE	120/277V AC
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
Mounting	Flame, Fire-resistant
Finish	White
BEAM ANGLE	100°
MATERIAL	Thermo plastic ABS Housing
LIFESPAN	≥60,000hours
DIMMABLE	NA
INPUT RATING	5W, 50Ma
BATTERY CAPACITY	500mAh
EMERGENCY TIME	90Min
INITIAL CHARGE TIME	24Hours
BATTERY TYPE	2 X 4.8V NiCad BATTERY
LED INDICATOR	Green
OPERATING TEMP	(32°F~ 104°F) 0~40°C
RATING	Suitable for Damp Locations
WARRANTY	5 year limited

INSTALLATION

Wall mounting or ceiling mounting

CERTIFICATION

UL 924 listed for damp locations. It meets NFPA 101 life safety code, NEC, OSHA, California Energy Commission (CEC) Title 20 Compliant

FEATURE

Universal field selectable single / double face

ENERGY SAVINGS

60% more energy savings than PL lamps.

LISTING

UL Listed.

