

240W UFO HIGH BAY / 3CCT / SELECTABLE WATTAGE

BLAZE 240W

RY-UFO-240W-110-H-3W3CCT




PROJECT

DESCRIPTION

The Blaze 240W UFO LED High Bay delivers powerful, energy-efficient illumination for warehouses, manufacturing facilities, gyms, and other high-ceiling commercial spaces. It features 3 selectable CCT options and selectable wattage for added flexibility, with an optional motion sensor available for enhanced energy savings and control. The fixture is ETL Listed and California Title 24 compliant, providing reliable performance while meeting current safety and energy-efficiency requirements

SPECIFICATION DETAILS

Input Voltage	120-277 VAC
Light Source	AC LED Module
Power	150W -200W-240W
Total Lumen 150w	21000lm
Total Lumen 200W	28000lm
Total Lumen 240W	33600lm
Color Temperature	Selectable CCT 3000K/4000K/5000K
CRI (Ra)	80+CRI
LED Rated Life	50,000 + hours
Dimming	0-10V
Diffuser Details	Frosted PC Diffuser
Beam Angle	110°
Mounting	Ceiling
Finish	Architectural Black
Illumination Direction	Diffused
Construction	Die-Cast Aluminum
Sensor	Optional Plug & Play
Standards	ETL Wet Locations IP65 JA8

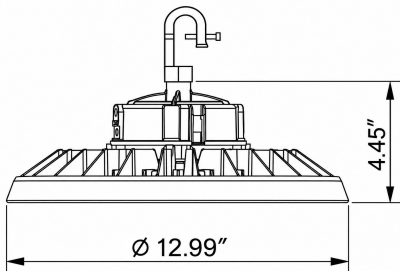

OPTIONAL ACCESSORIES




Photocell
RY-ANT-5-4T-PC




Motion Sensor
RY-ANT-5-4T

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

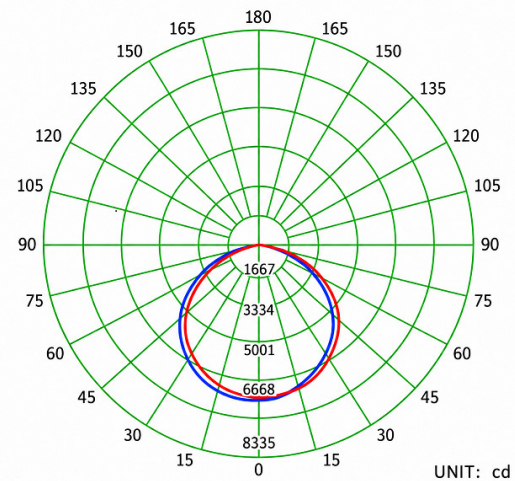

VERTICAL EQUILUMINOUS CURVE

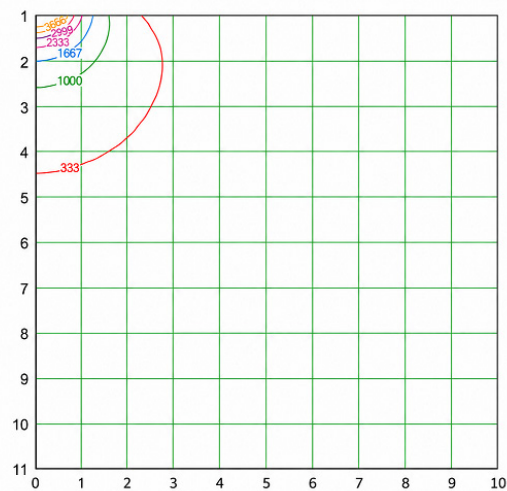

HORIZONTAL DISTANCE (meter)

MINIMUM ALTITUDE 1.0 M
MAXIMUM ALTITUDE 11.0 M
MAXIMUM ILLUMINATION 6668 lx

(5%) : 333.3 lx	(15%) : 1000.0 lx
(25%) : 1666.6 lx	(35%) : 2333.3 lx
(45%) : 2999.9 lx	(55%) : 3666.6 lx
(65%) : 4333.3 lx	

