


3.6W COB WET LOCATION LED TAPE LIGHT (3000K)

DOT LESS

1936-WT24V-30K

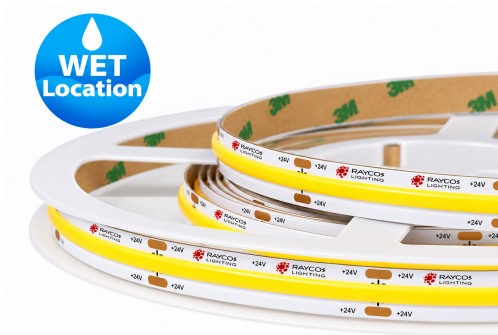


PROJECT

DESCRIPTION

This high-output LED spotless tape light delivers smooth, continuous illumination with no visible LED hot spots. Consuming only 3.6 watts per foot, it provides excellent brightness while maintaining high energy efficiency. With 90+ CRI for accurate color rendering, UL Listed construction, and dimmable performance, it is an ideal choice for cove lighting, exterior applications, architectural details, and other residential or commercial installations.


SPECIFICATION DETAILS

Dimensions	L 16.4" per Role
Light Source	DC LED Module
Power	3.6W / FT
Total Lumen	360 lm / FT
Delivered Lumen	360 lm
Input Voltage	24V DC
Color Temperature	3000K
CRI (Ra)	90 + CRI
LED Rated Life	60,000 hours
Dimmable	Yes
Diffuser Details	180° Beam Angle
Environment	Wet location IP65
Mounting	Ceiling / Wall / Channels
Working Temp	-4~104
Cut Points	1.64"
Lead wire	6"
Driver	Requires 24V DC LED Driver
Standards	UL listed JA8 Title24



Color Vector Graphic

LED Tape Light



Test Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%



3000K
Color Temperature



3.6 W/ft
Power Consumption



150°
Beam Angle



CRI 90
Color Rendering Index



360 lm/ft
Luminous Flux

COMMENT

